




DIN 818-2 YÜKSEK DAYANIMLI KALDIRMA ZİNCİRİ

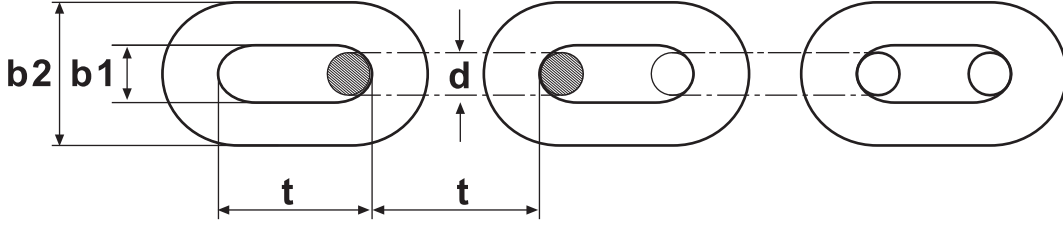

Chain Diameter Zincir Ölçüsü	Pitch Hatve	Inside Width İç Genişlik	Outside Width Dış Genişlik	Working Load Çalışma Yüğü	Proof Load Test Yüğü	Breaking Load Kopma Yüğü	Weight Ağırlık
d mm	t mm	b1 (min) mm	b2 (max) mm	kg	kN	kN	kg/m
6	18	7,8	22,2	1.000	28	45	0,8
7	21	9,1	25,9	1.500	39	62	1,1
8	24	10,4	29,6	2.000	50	80	1,4
10	30	13	37	3.150	79	126	2,2
13	39	16,9	48,1	5.300	133	212	3,8
16	48	20,8	59,2	8.000	201	322	5,7
18	54	23,4	66,6	10.000	254	407	7,3
19	57	24,7	70,3	11.200	284	454	8,1
20	60	26	74	12.500	314	503	9
22	66	28,6	81,4	15.000	380	608	10,9
23	69	29,9	85,1	16.000	415	665	12
25	75	32,5	92,5	20.000	491	785	14,1
26	78	33,8	96,2	21.200	531	849	15,2
28	84	36,4	104	25.000	616	985	17,6
32	96	41,6	118	31.500	804	1.290	23
36	108	46,8	133	40.000	1.020	1.630	29
40	120	52	148	50.000	1.260	2.010	36
45	135	58,5	167	63.000	1.590	2.540	45,5