




DEE SHACKLE

With Screw Collar Pin G-4151

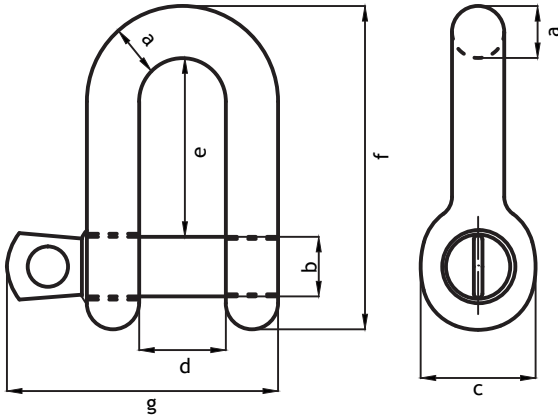

SWL ton	a mm	b mm	c mm	d mm	e mm	f mm	g mm	Weight kg
0,33	5	6	13	10	19	38	31	0,02
0,50	7	8	17	12	22	47	40	0,05
0,75	9	10	21	14	26	56	49	0,09
1,00	10	11	23	17	32	66	56	0,14
1,50	11	13	26	19	37	74	68	0,19
2,00	13,5	16	34	22	43	85	76	0,32
3,25	16	19	40	27	51	105	93	0,54
4,75	19	22	47	31	59	125	107	0,87
6,50	22	25	53	36	73	144	123	1,34
8,50	25	28	60	43	85	161	141	2,08
9,50	28	32	67	47	90	179	158	2,77
12,00	32	35	74	51	94	199	176	3,72
13,50	35	38	80	57	115	220	192	5,14
17,00	38	42	89	60	127	239	208	6,85
25,00	45	50	104	74	149	283	250	11,45
35,00	50	57	111	83	171	333	281	16,86
42,50	57	65	134	95	190	360	321	24,61
55,00	65	70	145	105	203	399	355	32,65

SWL : Safety Working Load
Proof Load = 2 x SWL
Hot dipped galvanized