



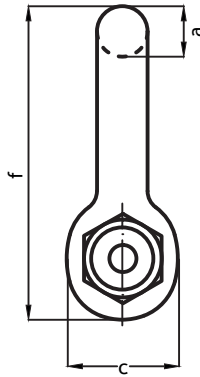

DEE SHACKLE

With Safety bolt G-4153

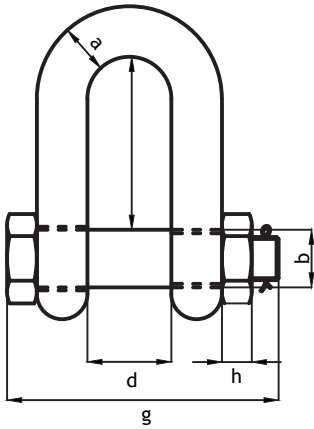

SWL ton	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	Weight kg
2,00	13,5	16	34	22	43	85	83	13	0,39
3,25	16	19	40	27	51	105	99	17	0,67
4,75	19	22	47	31	59	125	115	20	1,08
6,50	22	25	53	36	73	144	131	23	1,66
8,50	25	28	60	43	85	161	151	25	2,46
9,50	28	32	67	47	90	179	167	28	3,40
12,00	32	35	74	51	94	199	179	31	4,51
13,50	35	38	80	57	115	220	198	34	6,10
17,00	38	42	89	60	127	239	202	19	7,63
25,00	45	50	104	74	149	283	244	24	13,25
35,00	50	57	111	83	171	333	270	27	18,53
42,50	57	65	134	95	190	360	302	30	25,94
55,00	65	70	145	105	203	399	330	33	35,33
85,00	75	83	163	127	229	455	376	40	52,97

SWL : Safety Working Load
Proof Load = 2 x SWL
Hot dipped galvanized