





BOW SHACKLE

With Screw Collar Pin G-4161

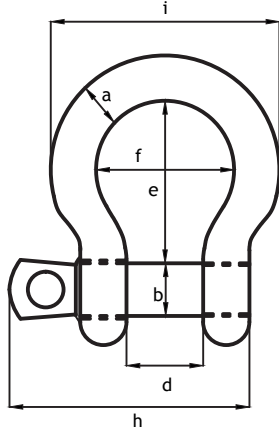

SWL ton	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	Weight kg
0,50	7	8	17	12	29	20	54	43	37	0,06
0,75	9	10	21	14	32	22	61	51	42	0,11
1,00	10	11	23	17	37	26	71	61	49	0,16
1,50	11	13	26	19	43	29	80	68	54	0,22
2,00	13,5	16	34	22	51	32	91	83	63	0,42
3,25	16	19	40	27	64	43	114	99	79	0,74
4,75	19	22	47	31	76	51	136	115	94	1,18
6,50	22	25	53	36	83	58	157	131	107	1,77
8,50	25	28	60	43	95	68	176	151	124	2,58
9,50	28	32	67	47	108	75	197	167	137	3,66
12,00	32	35	74	51	115	83	218	179	154	4,91
13,50	35	38	80	57	133	92	240	198	170	6,54
17,00	38	42	89	60	146	99	262	202	183	8,19
25,00	45	50	104	74	178	126	314	244	226	14,22
35,00	50	57	111	83	197	138	358	270	250	19,85
42,50	57	65	134	95	222	160	414	302	287	28,33
55,00	65	70	145	105	260	180	463	330	329	39,59
85,00	75	83	163	127	329	190	556	376	355	62,00

SWL : Safety Working Load

Proof Load = 2 x SWL

Hot dipped galvanized