



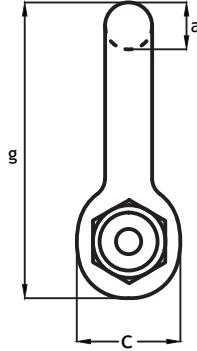

BOW SHACKLE

With Safety bolt G-4163

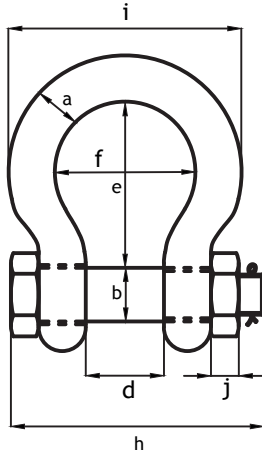

SWL ton	a mm	b mm	c mm	d mm	e mm	f mm	g mm	h mm	i mm	j mm	Weight kg
0,50	7	8	17	12	29	20	54	43	37	4	0,06
0,75	9	10	21	14	32	22	61	51	42	5	0,11
1,00	10	11	23	17	37	26	71	61	49	8	0,16
1,50	11	13	26	19	43	29	80	68	54	11	0,22
2,00	13,5	16	34	22	51	32	91	83	63	13	0,42
3,25	16	19	40	27	64	43	114	99	79	17	0,74
4,75	19	22	47	31	76	51	136	115	94	20	1,18
6,50	22	25	53	36	83	58	157	131	107	23	1,77
8,50	25	28	60	43	95	68	176	151	124	25	2,58
9,50	28	32	67	47	108	75	197	167	137	28	3,66
12,00	32	35	74	51	115	83	218	179	154	31	4,91
13,50	35	38	80	57	133	92	240	198	170	34	6,54
17,00	38	42	89	60	146	99	262	202	183	19	8,19
25,00	45	50	104	74	178	126	314	244	226	24	14,22
35,00	50	57	111	83	197	138	358	270	250	27	19,85
42,50	57	65	134	95	222	160	414	302	287	30	28,33
55,00	65	70	145	105	260	180	463	330	329	33	39,59
85,00	75	83	163	127	329	190	556	376	355	40	62,00

SWL : Safety Working Load

Proof Load = 2 x SWL

Hot dipped galvanized