




TRIANGLE PLATES DIN 82015

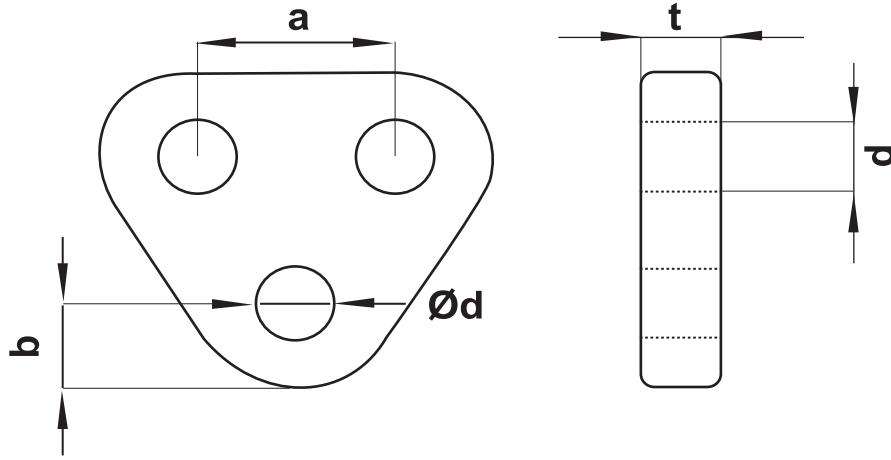

SWL	a	b	Ød	t	Weight
2 TON	75 mm	25 mm	23 mm	25 mm	2,00 kg
3 TON	90 mm	30 mm	30 mm	30 mm	3,00 kg
5 TON	115 mm	40 mm	39 mm	35 mm	5,00 kg
8 TON	140 mm	50 mm	48 mm	45 mm	10,00 kg
10 TON	145 mm	55 mm	52 mm	50 mm	15,00 kg
12 TON	110 mm	40 mm	40 mm	40 mm	6,50 kg
14 TON	120 mm	43 mm	42 mm	45 mm	8,50 kg
17 TON	130 mm	50 mm	45 mm	45 mm	9,50 kg
25 TON	140 mm	65 mm	55 mm	50 mm	13,50 kg
35 TON	150 mm	70 mm	60 mm	60 mm	19,00 kg
55 TON	180 mm	85 mm	75 mm	80 mm	37,50 kg
85 TON	220 mm	110 mm	90 mm	90 mm	62,00 kg
120 TON	240 mm	130 mm	105 mm	110 mm	95,00 kg
150 TON	260 mm	135 mm	115 mm	130 mm	133,00 kg
175 TON	290 mm	145 mm	115 mm	140 mm	163,00 kg
200 TON	380 mm	160 mm	140 mm	150 mm	282,00 kg
250 TON	450 mm	175 mm	150 mm	170 mm	413,00 kg

SWL : Safety Working Load

Minimum Breakink Load (MBL) = 5 x SWL